

# USB Device Server SX-1000U



**Ideal for Networking Multi-Function & All-In-One Printers**


## Intuitively share USB devices directly on your Local Area Network

### Features & benefits

- ❑ **Convert your Multi-Function or All-In-One printer to a LAN resource.** Instantly allows your family members or co-workers to print, scan, fax and store from anywhere across the network, taking full advantage of its capabilities including the printer's status monitoring and other MFP/AIO software compatibility.
- ❑ **Perfect for use with various USB devices** such as USB hard drives, CD/DVD/Zip drives, MP3 players, scanners, printers and digital cameras, enhancing fun and convenience, while maximizing the return on your USB device investment.
- ❑ **Print server functionality.** Turn your SX-1000U USB device server easily into a true print server. Simply print from your application like you normally do. The bundled utility SX Virtual Link can be set to connect to the printer and send the job automatically, while still ensuring that the printer will become available for another user's print job or functions (e.g. scanning or storing with AIO printer).
- ❑ **SX Virtual Link allows the user to visually manage all the connected USB devices in the network.** This intelligent utility provides you with device availability on a real time basis.

It can also automatically launch the USB device application software utility when the device is connected to your PC through the SX-1000U.

### Networking example

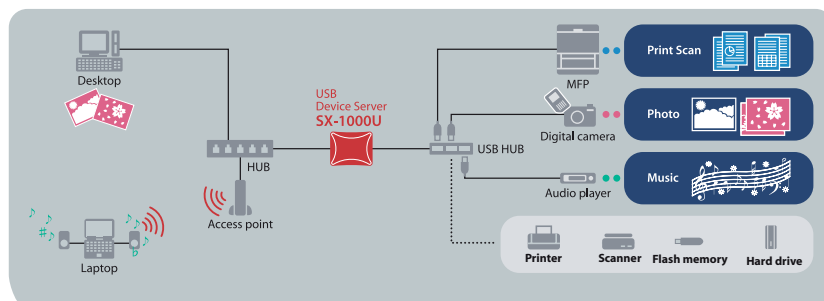

### Technical Specifications

Supported Operating Systems	Windows 7/Vista/XP/2000 (32/64 bit), Server 2008/2003,* MacOS 10.2.7 or higher
Supported protocol	TCP/IP
Device interface	USB 2.0 Full Speed (A-Type) x 1
Network interface	10 BASE-T / 100 BASE-TX (Auto-detection)
Total number of USB interface connections	15 (When used with a USB hub)
Configuration	Web browser, Quick Setup, telnet
Languages (Installation utility)	English, German, French, Italian, Spanish, Portuguese, Japanese
Power supply	Universal AC adapter (AC100 - 240V)
Power consumption	5W (DC5V 1.0A)
Warranty	2 years
Regulatory approvals	FCC, CE, VCCI Class B
Package contents	SX-1000U, Setup Guide, AC adapter, Warranty booklet, CD-ROM with configuration utilities and PDF manuals
Dimensions	3.1 x 3.9 x 1.1 in / 80 x 100 x 28 mm
Weight	3.5 oz / 100 g

The SX-1000U does not currently support USB devices using isochronous data transfer mode, such as web cameras & soundcards. Some USB devices may not be supported depending on the USB device driver specification. Contact one of silex support locations or visit our web site for the latest compatibility information.

\*) subject to device driver

silex technology is a registered trademark of silex technology, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2009 silex technology europe GmbH. All rights reserved.

### Global sales & support

**Europe Office**  
silex technology europe GmbH  
+49-2151-65009-0  
Cost-free Hotline Germany:  
0800-7453938 (SILEX EU)  
www.silexeurope.com  
> contact@silexeurope.com

**Corporate Headquarters**  
silex technology, Inc.  
+81-774-98-3782  
www.silex.jp  
> support@silex.jp

**US Office**  
silex technology america, Inc.  
+1-801-747-0656  
Cost-free Hotline USA:  
866-765-8761  
www.silexamerica.com  
> contact@silexamerica.com

**China Office**  
silex technology beijing, Inc.  
+86-10-8497-1430  
www.silex.com.cn  
> contact@silex.com.cn